

Parka Cover Installation

With the Snow Plow removed from the vehicle and positioned on its park stand, install the parka cover as follows:

NOTE: The parka will have a better fit if the handles are retracted.

1. Drape the parka cover over one side of the lights. (See Figure 1.)



Figure 1

2. Pull the remaining side over the other light. (See Figure 2.)



Figure 2

3. Pull the cover skirt around the quick disconnect handles on the plow. (See Figure 3 and Figure 4.)

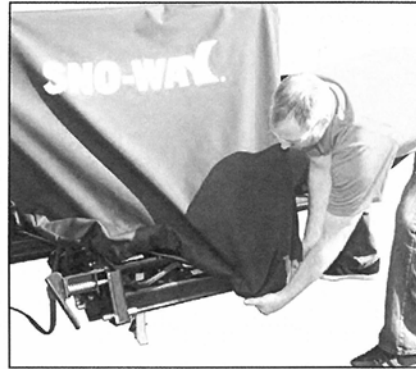


Figure 3

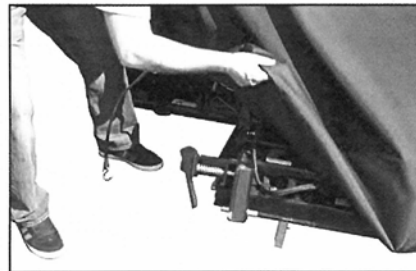


Figure 4

4. Pull the skirt around the base of the pump platform so that the skirt hooks around the base of the pump platform. (See Figure 5.)

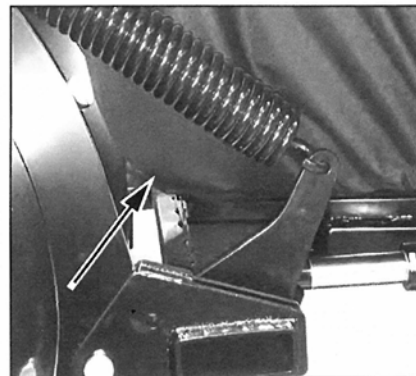


Figure 5

5. Take the rubber strap and extended it across underneath the a-frame and hook the other end into the eye on the plow parka. (See Figure 6 and Figure 7.)



Figure 6

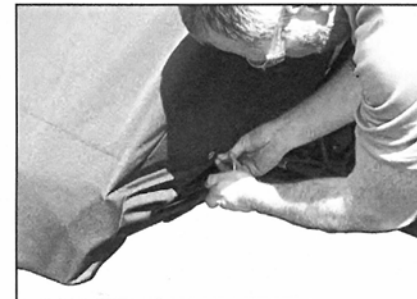


Figure 7

Parka Cover Removal

1. Remove the rubber strap. (See Figure 8.)



Figure 8

2. Pull the skirt loose on one side of the mount system, then pull the other side off the mount system. (See Figure 9.)

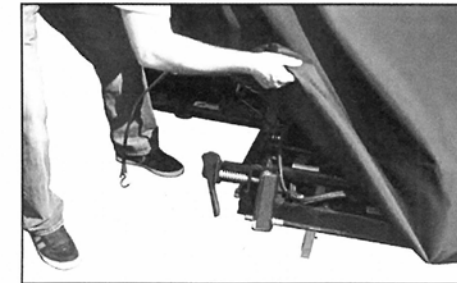


Figure 9

3. Pull up the parka to the lights. Remove one side, then the other. (See Figure 10.)



Figure 10

4. Fold up the parka in a square shape and put it into the zip bag for storage.